



Instruction Sheet

PW5, PW13 & EF3 Everfull Bowls Automatic Waterers



Water Level Instructions

Fasten hose to water supply and turn water on. Wait 15 minutes. If you desire a different water level, remove the metal float cover (2 screws) and follow step #1 or step #2.

Step #1: If your pet waterer has a **low** water level, bend brass rod with float slightly up. (See figure A.) When you find the desired level, replace the metal float cover and fasten.

Step #2: If your pet waterer has a **high** water level, bend brass rod with float slightly down. (See figure B.) When you find the desired level, replace the metal float cover and fasten.

Note: Make sure that the water level in steps #1 and #2 are not too high as the float will hit the top of the metal float cover, causing flooding.

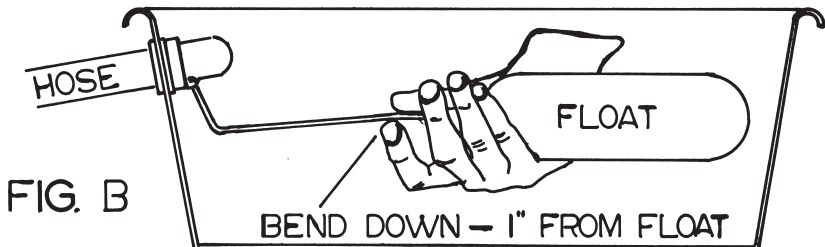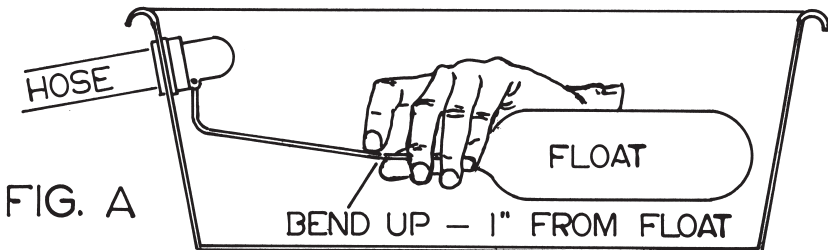

MILLER MANUFACTURING COMPANY

1450 W. 13th Street • Glencoe, MN 55336 • (651) 982.5100 • Fax (651) 982.5101

www.miller-mfg.com